



HARO RHEALS7270S

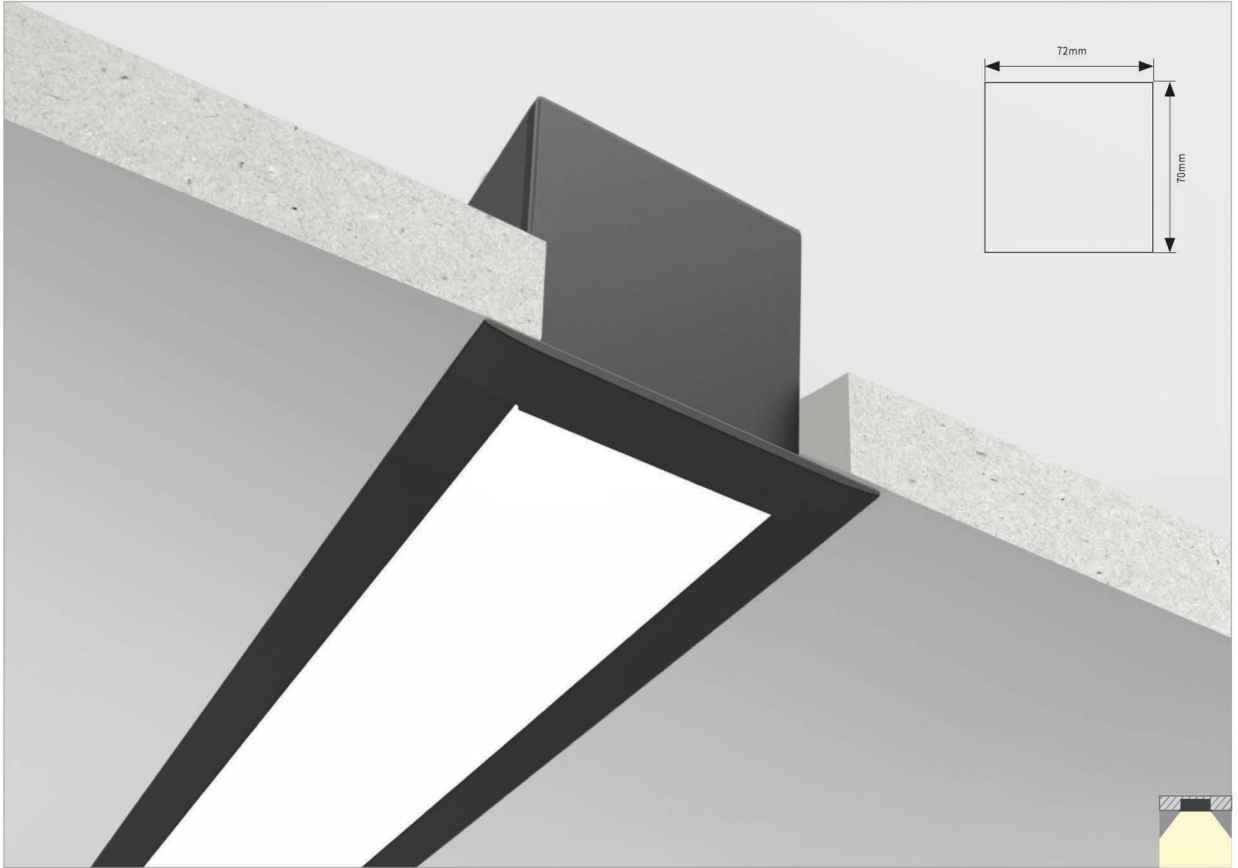

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.270	30	SMD2835	2800-3200K	2100	>80	>0.9
				3800-4200K	2250		
				4800-5300K	2250		

Material: AL6063-T5
 Surface: Anodized/ Painting
 Cover: Diffuser /Transparent /Opal
 Lighting source width: 23 mm
 Available lengths: 0.5-3M
 Application: Commercial lighting /Office lighting

Silver
 Black
 White (ra19016)



1.0m	1480.9 , 1190.1 lx	270.22cm
2.0m	370.2 , 297.5 lx	540.43cm
3.0m	164.5 , 132.2 lx	810.65cm
4.0m	92.6 , 74.4 lx	1080.87cm
5.0m	59.2 , 47.6 lx	1351.08cm
6.0m	41.1 , 33.1 lx	1621.30cm
7.0m	30.2 , 24.3 lx	1891.52cm
8.0m	23.1 , 18.6 lx	2161.74cm
9.0m	18.3 , 14.7 lx	2431.95cm
10.0m	14.8 , 11.9 lx	2702.17cm