



Part Number: EST-FS2835C-120H-24-Y (One LED / Group)



Model	Color temp.	LM/M	Power/M	Light efficiency	CRI (Ra)	FPC copper
EST-FS2835WW-120H-24-Y	2300K	2300LM	<23W	100LM/W	90+	3OZ
EST-FS2835WW-120H-24-Y	2700K	2415LM	<23W	105LM/W	90+	3OZ
EST-FS2835WW-120H-24-Y	3000K	2415LM	<23W	105LM/W	90+	3OZ
EST-FS2835WW-120H-24-Y	3500K	2530LM	<23W	110LM/W	90+	3OZ
EST-FS2835NW-120H-24-Y	4000K	2599LM	<23W	113LM/W	90+	3OZ
EST-FS2835NW-120H-24-Y	5000K	2576LM	<23W	112LM/W	90+	3OZ
EST-FS2835PW-120H-24-Y	6500K	2553LM	<23W	111LM/W	90+	3OZ

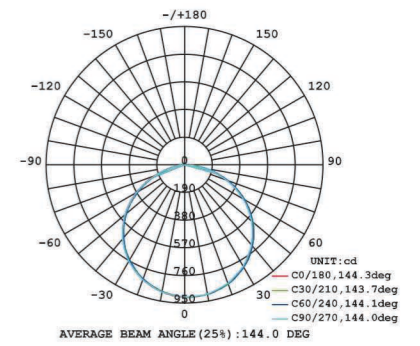


Strip length: CE:500CM

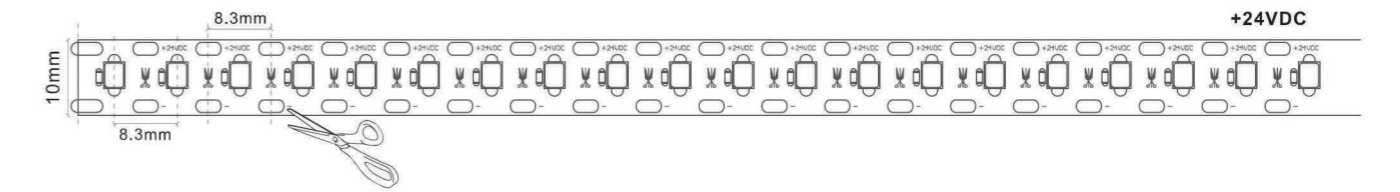


IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue



AL. profiles (mm)

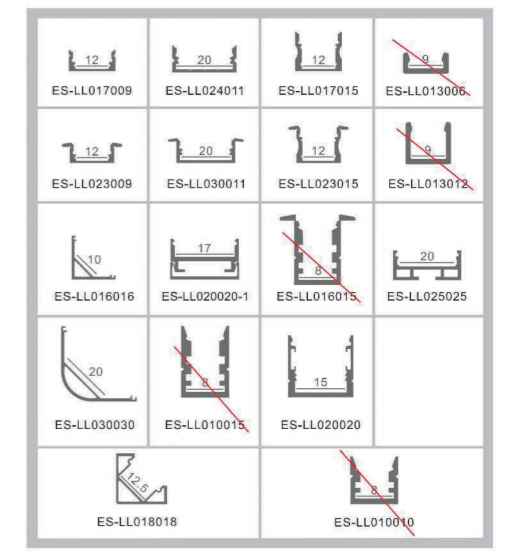

Ultrashort cuttable series

RA 90+ SMD2835 Series

Product Features

1. The shortest cuttable length can be 8.3mm.
2. It can meet the custom length precisely.

Model	Color temp.	Luminous Flux		I <sub>f</sub>	V <sub>f</sub>		CRI(Ra)
		Min.	Max.		Current	Max.	
<b>SMD2835</b>	2300K	50LM	55LM	30mA	17.5V	19V	90+
	2700K	50LM	55LM	30mA	17.5V	19V	90+
	3000K	55LM	60LM	30mA	17.5V	19V	90+
	3500K	55LM	60LM	30mA	17.5V	19V	90+
	4000K	55LM	60LM	30mA	17.5V	19V	90+
	5000K	55LM	60LM	30mA	17.5V	19V	90+
	6500K	55LM	60LM	30mA	17.5V	19V	90+

