
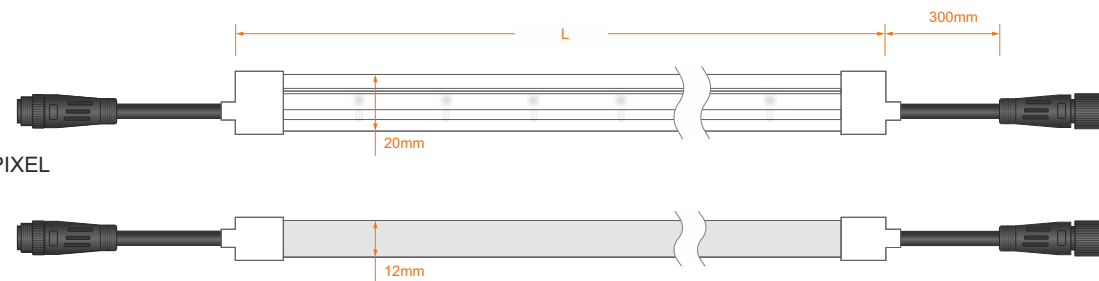


DMX512 Pixel RLLNFSB1220

- IP67 protection level, salt solution resistance, weak acid and alkali corrosion and UV resistance.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- 3 years warranty, working life ≥30000 hours;



Model:RLLNFSB1220 PIXEL

Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		OD: 5.0mm	● ● ●	SPI: Red V+, Green DI/DO, Black V-
		OD: 5.5mm	● ● ● ●	Breakpoint Transmissior RedV+, GreenBI/BO, BlueDI/DO, BlackV-
		OD: 5.5mm	● ● ● ● ○	DMX512: RedV+, GreenPI/PO, BlueAI/AO, WhiteBI/BO, BlackV-
Silicone Cable		OD: 5.0mm	● ● ●	SPI: RedV+, GreenDI/DO, BlackV-
		OD: 6.0mm	● ● ● ●	Breakpoint Transmissior RedV+, GreenBI/BO, BlueDI/DO, BlackV-
		OD: 6.0mm	● ● ● ● ○	DMX512: RedV+, GreenPI/PO, BlueAI/AO, WhiteBI/BO, BlackV-

RGB (RLLNFSB1220RGB Crgb DMX512)

Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM/M)	Efficiency (LM/W)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
DC24V	4.8	R	30	6.3	8	125	DMX512	UCS512C2L
	4.8	G	115	24.0				
	4.8	B	20	4.2				
	12	RGB	161	13.4				

RGBW (RLLNFSBRGBW Crgbw DMX512)

Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM/M)	Efficiency (LM/W)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
DC24V	4.8	R	28	5.8	8	125	DMX512	UCS512C2L
	4.8	G	80	16.7				
	4.8	B	16	3.3				
	4.8	W(4000K)	96	20.0				
	15	RGBW	211	14.1				