

LED Neon Flex Series

360°Circle: RLLNFR22

High quality and high brightness SMD LED chip.
Environmentally friendly & energy efficient.
High color consistency & smooth illumination With invisible light dots.
Perfect softness, gentle emitting, Not dazzling.



Specifications



Fittings



Transparent card buckle
Item NO: JK0017
Dimension: 10*17.5*26.5mm
Material: 304 Stainless steel



Screw
Item NO: JA0014
Dimension: 10*11.94*7.5mm
Material: 316 Stainless steel



Lifting rope
Item NO: JE0006
Dimension: 1000mm
Material: Stainless steel




360° neon casing non hole plug
Item NO: JD0010
Dimension: Ø22*T22Dmm
Material: Silica gel

Application



Luminaire Photometric Data

Luminous intensity distribution diagram

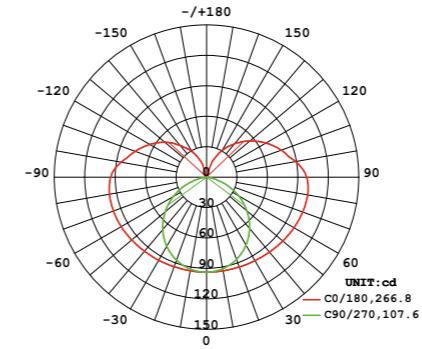

AVERAGE BEAM ANGLE(50%): 187.2 DEG

Connection Methods



Top end



End Cap



Datasheet

Model No.	CCT	LED Model	LEDs/M	Typ. Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
RLL C27120C	2700K	2835	120	2600 2800	2*10	770	90	50	8	10M
RLL C30120C	3000K	2835	120	2850 3300	2*10	780	90	50	8	10M
RLL C40120C	4000K	2835	120	3850 4400	2*10	800	90	50	8	10M
RLL C50120C	5000K	2835	120	4800 5400	2*10	820	90	50	8	10M
RLL C65120C	6500K	2835	120	5600 7000	2*10	835	90	50	8	10M
RLL CRE120C	Red	2835	120	620 625nm	2*10	130		50	8	10M
RLL CGE120C	Green	2835	120	520 525nm	2*10	221		50	8	10M
RLL CBL120C	Blue	2835	120	460 465nm	2*10	110		50	8	10M
RLL CYE120C	Yellow	2835	120	590 595nm	2*10	200		50	8	10M
RLL CPI120C	Pink	2835	120		2*10	165		50	8	10M
RLL CUV120C	Purple	2835	120	390 400nm	2*10	6		50	8	10M
RLL COR120C	Orange	2835	120	600 610nm	2*10	500		50	8	10M
RLL CTW120C	WW CW	2835	120	2700 6500	2*8	1550	80	50	5	10M
RLL GRG120C	RGB	3535	120	RGB	2*12	365		50	8	7.5M