


LED Neon Flex Series

Side View-S: RLLNFSB1010





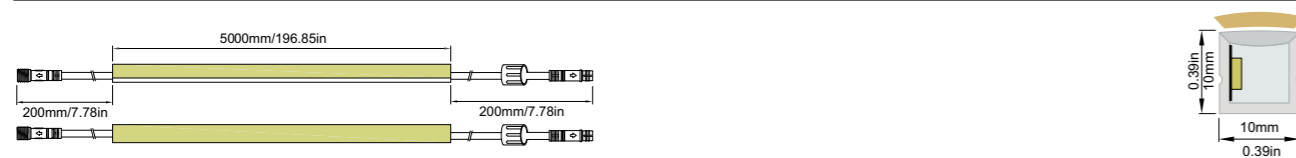

High quality and high brightness SMD LED chip.
Environmentally friendly & energy efficient.
High color consistency & smooth illumination With invisible light dots.
Perfect softness, gentle emitting, Not dazzling.



Specifications



Fittings


		
Aluminium tank Item NO JA0026 Dimension: 1000*11.9*14mm Material Aluminium	Transparent accessories Item NO JK0022 Dimension: 20*12.2*8.5mm Material 316 Stainless steel	Bendable Stainless Steel Profile Item NO JL0003 Dimension: 1000*10.5*5mm Material 304 Stainless steel
		
Rubber sleeve Item NO JL0003 Dimension: 12*12*8mm Material Silica Gel	Screw Item NO JS0001 Dimension: 3*16mm Material 316 Stainless steel	Stainless steel buckle Item NO JL0014 Dimension: 10*11.94*7.5mm Material 6063Al

Application



Luminaire Photometric Data

Luminous intensity distribution diagram

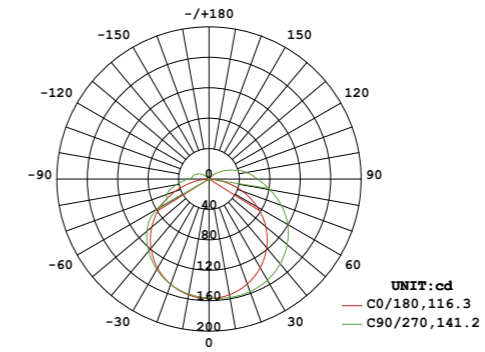

Connection Methods



Top end

End Cap

Datasheet



Model No.	CCT	LED Model	LEDs/M	Typ. Cdour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF C27120C	2700K	2835	120	2600 2800	10.0	560	90	50	6	5M/Roll
NF C30120C	3000K	2835	120	2850 3300	10.0	570	90	50	6	5M/Roll
NF C40120C	4000K	2835	120	3850 4400	10.0	575	90	50	6	5M/Roll
NF C50120C	5000K	2835	120	4800 5400	10.0	575	90	50	6	5M/Roll
NF C65120C	6500K	2835	120	5600 7000	10.0	568	90	50	6	5M/Roll
NF CRE120C	Red	2835	120	620 625nm	10.0	180		50	6	5M/Roll
NF CGR120C	Green	2835	120	520 525nm	10.0	232		50	6	5M/Roll
NF CBL120C	Blue	2835	120	460 465nm	10.0	134		50	6	5M/Roll
NF CYE120C	Yellow	2835	120	590 595nm	10.0	302		50	6	5M/Roll
NF CPI120C	Pink	2835	120		10.0	309		50	6	5M/Roll
NF COR120C	Orange	2835	120	600 610nm	10.0	166		50	6	5M/Roll
NF CTW120C	WW CW	2835	120	2700 6500	2*8	372	90	50	6	5M/Roll
NF GRG120C	RGB	3535	120	RGB	12.0	258		50	6	5M/Roll