



# LED Neon Flex Series

## Top View-S: RLLNFTB1010

High quality and high brightness SMD LED chip.  
Environmentally friendly & energy efficient.  
High color consistency & smooth illumination With invisible light dots.  
Perfect softness, gentle emitting, Not dazzling.



## Specifications

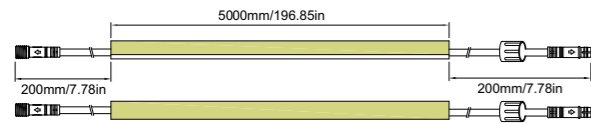

## Fittings



Aluminium tank

Item NO JA0026  
Dimension: 1000\*11.9\*14mm  
Material Aluminium



Transparent accessories

Item NO JK0022  
Dimension: 20\*12.2\*8.5mm  
Material 316 Stainless steel



Bendable Stainless Steel Profile

Item NO JL0003  
Dimension: 1000\*1.5\*5mm  
Material 304 Stainless steel



Rubber Sleeve

Item NO JL0003  
Dimension: 12\*12\*8mm  
Material Silica Gel



Screw

Item NO JS0001  
Dimension: 3\*16mm  
Material 316 Stainless steel



Stainless Steel buckle


Item NO JL0014  
Dimension: 10\*11.94\*7.5mm  
Material 6063Al

## Application



## Luminaire Photometric Data

Luminous intensity distribution diagram

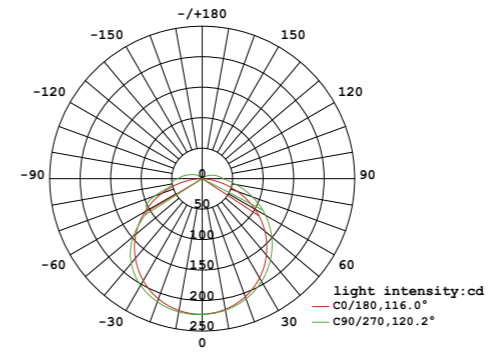

AVERAGE BEAM ANGLE(50%): 118.1°

## Connection Methods




Top end



End Cap

## Datasheet



Model No.	CCT	LED Model	LEDs/M	Typ. Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF C27120C A	2700K	2835	120	2600 2800	10.0	700	90	50	6	5M/Roll
NF C30120C A	3000K	2835	120	2850 3300	10.0	710	90	50	6	5M/Roll
NF C40120C A	4000K	2835	120	3850 4400	10.0	720	90	50	6	5M/Roll
NF C50120C A	5000K	2835	120	4800 5400	10.0	720	90	50	6	5M/Roll
NF C65120C A	6500K	2835	120	5600 7000	10.0	710	90	50	6	5M/Roll
NF CRE120C A	Red	2835	120	620 625nm	10.0	225		50	6	5M/Roll
NF CGR120C A	Green	2835	120	520 525nm	10.0	289		50	6	5M/Roll
NF CBL120C A	Blue	2835	120	460 465nm	10.0	163		50	6	5M/Roll
NF CYE120C A	Yellow	2835	120	590 595nm	10.0	378		50	6	5M/Roll
NF CPI120C A	Pink	2835	120		10.0	386		50	6	5M/Roll
NF COR120C A	Orange	2835	120	600 610nm	10.0	208		50	6	5M/Roll
NF CTW120C A	WW CW	2835	120	2700 6500	2*8	465	90	50	6	5M/Roll
NF GRG120C A	RGB	3535	120	RGB	12.0	323		50	6	5M/Roll