



# LED Neon Flex Series

## Top view-M: RLLNFTB1212

High quality and high brightness SMD LED chip.  
Environmentally friendly & energy efficient.  
High color consistency & smooth illumination With invisible light dots.  
Perfect softness, gentle emitting, Not dazzling.



## Specifications

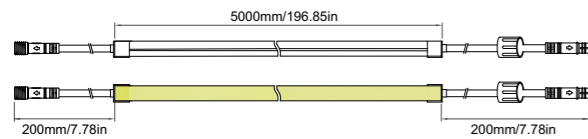

## Fittings



**Spring Clip Aluminum Profile**  
Item NO: JL0005  
Dimension 1000\*14\*14.5mm  
Material: 6063




**Since the card lock buckle**  
ITEM NO: JK0007  
Dimension: 30\*14\*14.5mm  
Material: 6063



**Stainless steel buckle**  
Item NO: JL0026  
Dimension 30\*14\*14.5mm  
Material: 304 Stainless steel



**Bendable Stainless Steel Profile**  
Item NO: JL0006  
Dimension 1000\*12.85\*10.4mm  
Material: Silica Gel  
Material: 304 Stainless steel



**Rubber sleeve**  
Item NO: JL0029  
Dimension 1000\*16.9\*17mm



**Screw**  
Item NO: JK0001  
Dimension 3\*16mm  
Material: 6063Al and 304 Stainless steel

## Application



## Connection Methods




Top end



End Cap

## Luminaire Photometric Data

Luminous intensity distribution diagram

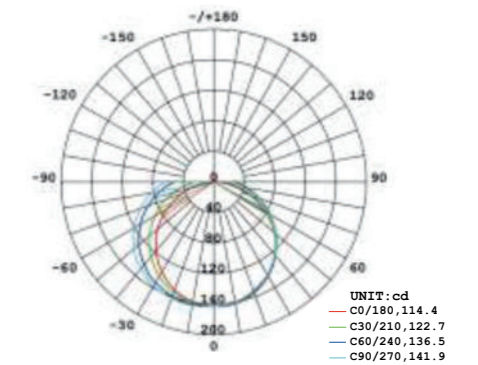

AVERAGE BEAM ANGLE(50%): 128.9 DEG

## Datasheet



Model No.	CCT	LED Model	LEDs/M	Typ. Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF C27140C B	2700K	2835	140	2600 2800	10.0	1040	90	50	8	12M
NF C30140C B	3000K	2835	140	2850 3300	10.0	1065	90	50	8	12M
NF C40140C B	4000K	2835	140	3850 4400	10.0	1100	90	50	8	12M
NF C50140C B	5000K	2835	140	4800 5400	10.0	1130	90	50	8	12M
NF C65140C B	6500K	2835	140	5600 7000	10.0	1150	90	50	8	12M
NF CRE140C B	Red	2835	140	620 625nm	10.0	318		50	8	12M
NF CGR140C B	Green	2835	140	520 525nm	10.0	403		50	8	12M
NF CBL140C B	Blue	2835	140	460 465nm	10.0	210		50	8	12M
NF CYE140C B	Yellow	2835	140	590 595nm	10.0	689		50	8	12M
NF CPI140C B	Pink	2835	140		10.0	650		50	8	12M
NF CUV140C B	Purple	2835	140	390 400nm	10.0	8		50	8	12M
NF COR140C B	Orange	2835	140	600 610nm	10.0	273		50	8	12M
NF CTW120C B	WW CW	2835	120	2700 6500	2*8	685	90	50	8	10M
NF GRG120C B	RGB	3535	120	RGB	12.0	452		50	8	7.5M