




# LED Neon Flex Series

## 3-face view: RLLNFTRI1006

High quality and high brightness SMD LED chip.  
Environmentally friendly & energy efficient.  
High color consistency & smooth illumination With invisible light dots.  
Perfect softness, gentle emitting, Not dazzling.

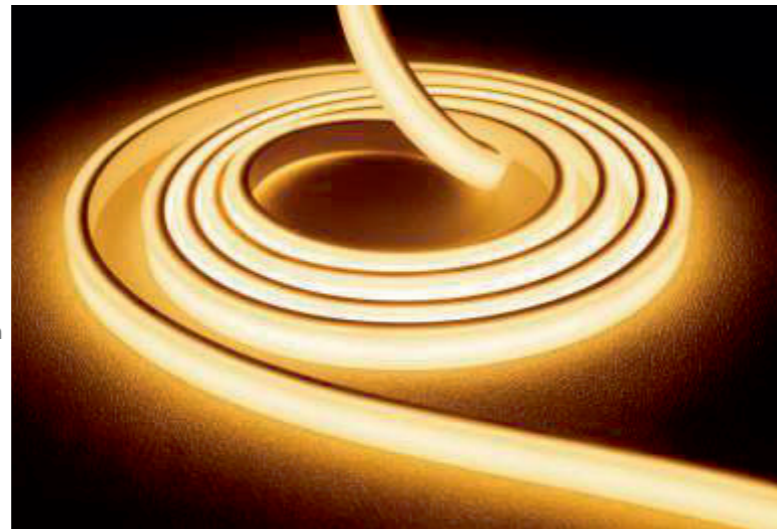

## Specifications

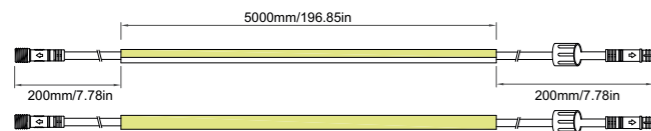

## Fittings



Aluminum tank

Item NO JA0049  
Dimension 1000\*11.8\*9.3mm  
Material Aluminium



Bendable Stainless Steel Profile

Item NO: JL0004  
Dimension 1000\*16.9\*17mm  
Material 304 Stainless steel



Transparent PC Slot

Item NO Ja0039  
Dimension 1000\*12.2\*8.5mm  
Material Transparent PC



Rubber sleeve

Item NO JL0014  
Dimension 10\*11.94\*7.5mm  
Material 316 Stainless steel



Screw

Item NO JL0014  
Dimension 10\*11.94\*7.5mm  
Material 316 Stainless steel



Transparent accessories


Item NO: JK0022  
Dimension 20\*12.2\*8.5mm  
Material Transparent PC

## Application



## Luminaire Photometric Data

Luminous intensity distribution diagram

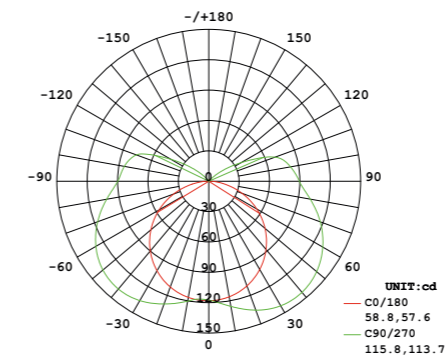

AVERAGE BEAM ANGLE(50%):172.9 DEG


## Connection Methods



Top end



End Cap



## Datasheet

Model No.	CCT	LED Model	LEDs/M	Typ. Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF Z27320C Q	2700K	COB	320	2600 2800	10.0	700	90	50	8	10M
NF Z30320C Q	3000K	COB	320	2850 3300	10.0	720	90	50	8	10M
NF Z40320C Q	4000K	COB	320	3850 4400	10.0	760	90	50	8	10M
NF Z50320C Q	5000K	COB	320	4800 5400	10.0	780	90	50	8	10M
NF Z65320C Q	6500K	COB	320	5600 7000	10.0	800	90	50	8	10M
NF ZRE320C Q	Red	COB	320	620 625nm	10.0	238		50	8	10M
NF ZGR320C Q	Green	COB	320	520 525nm	10.0	306		50	8	10M
NF ZBL320C Q	Blue	COB	320	460 465nm	10.0	170		50	8	10M
NF ZYE320C Q	Yellow	COB	320	590 595nm	10.0	390		50	8	10M