


Features:


- 3D bending and top lighting product
- 5050 LED with integrated lens
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Min. top bending radius 10 cm
- Min. side bending radius 25cm
- Beam angles: 30°x40°

Application:

- Indoor damp condition wall washer lighting
- High quality cove lighting

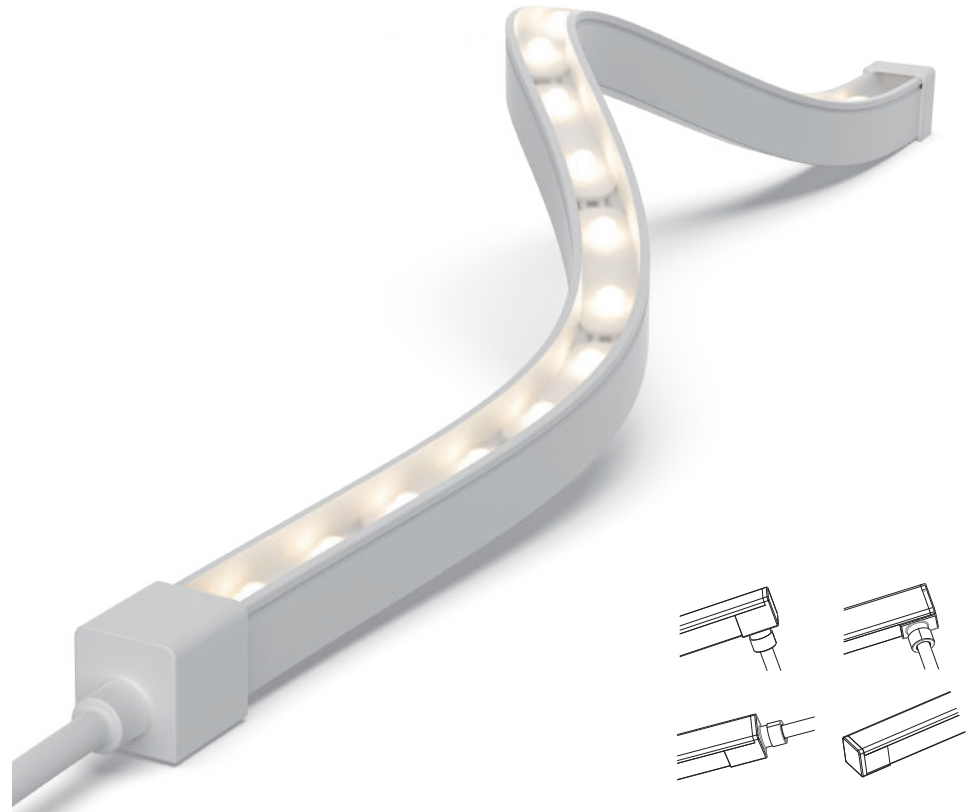

Installation accessories:

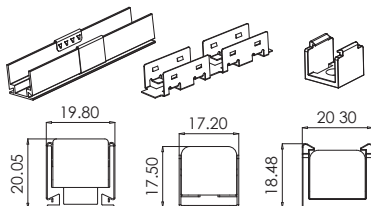

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFW3D 1617	DC24V	12	595	2700K	5mtrs	50	40
		12	625	3000K	5mtrs	50	40
		12	655	4000K	5mtrs	50	40
		12	655	5000K	5mtrs	50	40
		12	655	6500K	5mtrs	50	40