


**Features:**

- 3D bending and top lighting
- Enhance 3030 LED inside
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP65 and salt-mist proof
- L70B50 > 50,000hrs
- Various accessories for installation
- Min. top bending radius 15 cm
- Min side bending radius 40cm
- Optional beam angles: 20°/30°/45°/60°/20°x45°

**Application:**

- Indoor damp condition wall washer lighting

**Installation accessories:**

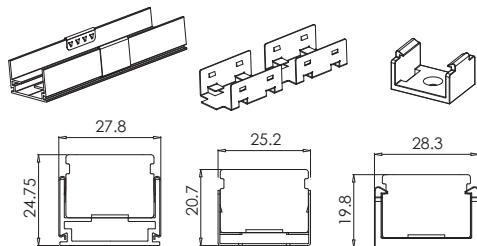

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFW3D 2417	DC24V	20	1530	2700K	5mtrs	83.3	36
		20	1610	3000K	5mtrs	83.3	36
		20	1700	4000K	5mtrs	83.3	36