


Features:


- 3D bending and top lighting
- Brand LED optional
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- Min. top bending radius 15 cm
- Min side bending radius 40cm
- Optional beam angles: 20°/30°/45°/60°/20x45°

Application:

- Outdoor and indoor wall washer lighting

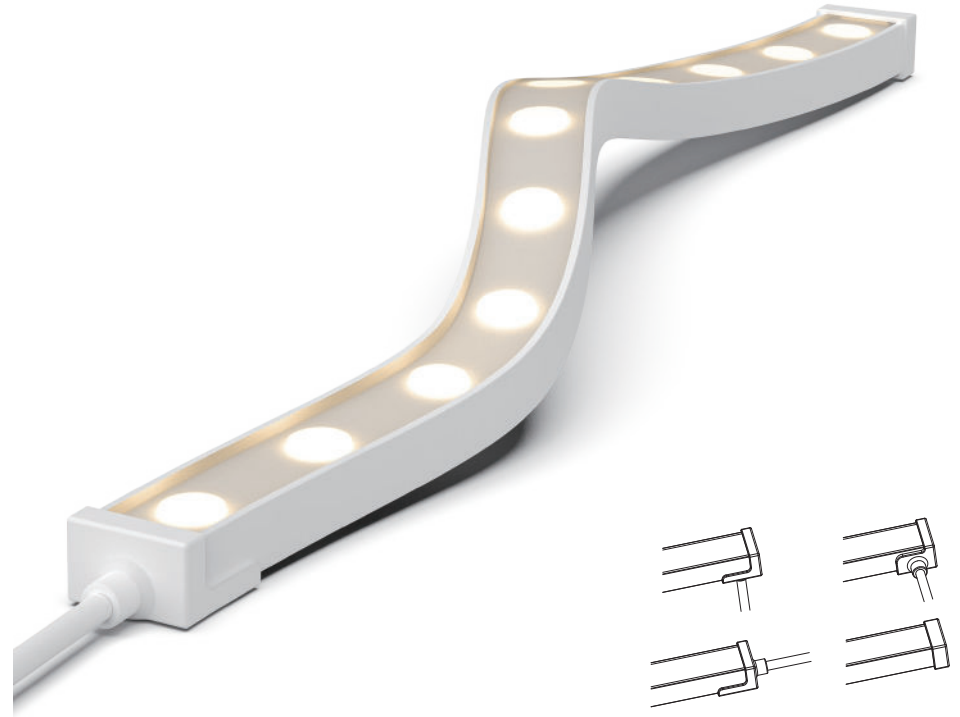

Installation accessories:

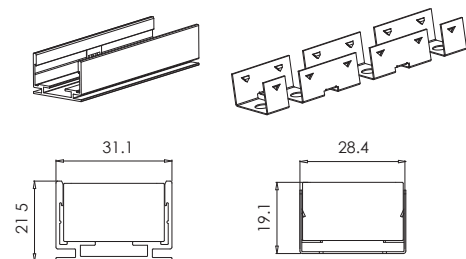

| Item | Input Voltage | Power (W/m) | Flux (Lm/m) | Available Color | Max. length (Single-end power in) | Cutting unit (mm) | LED Qty/m (LEDs/m) |
|-----------------|---------------|-------------|-------------|-----------------|-----------------------------------|-------------------|--------------------|
| RLLFW3D 2716 | DC24V | 24 | 1990 | 2700K | 5mtrs | 41.67 | 24 |
| | | 24 | 2100 | 3000K | 5mtrs | 41.67 | 24 |
| | | 24 | 2250 | 4000K | 5mtrs | 41.67 | 24 |
| RLLFW3D 2716-TW | DC24V | 16+16 | 1250 | Tunable White | 5mtrs | 41.67 | 24 |