


Features:


- Top lighting and side bending
- Brand LED optional
- Silicone + AL modular housing
- UV resistant PC lens
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Min. bending radius 10 cm
- Optional beam angles: 20°/30°/45°/60°/20°x45°

Application:

- Outdoor and indoor wall washer lighting

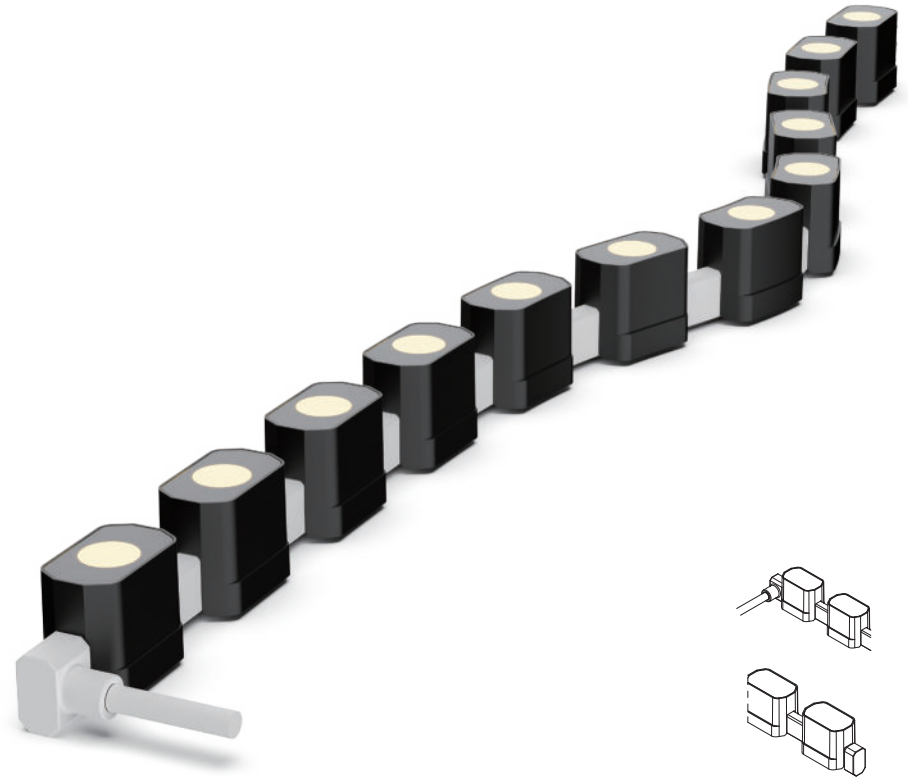

Installation accessories:

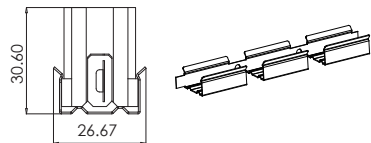

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFSB 3020	DC24V	36	2240@4000K	White	2.4mtrs	300	20
		24	1560@4000K	White	2.4mtrs	150	20
		24	840	RGBW	2.4mtrs	300	20
		24	840	Pixel RGBW	2.4mtrs	300	20