


Features:

- Top lighting and top bending
- 5050 LED with integrated lens
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Bending radius 10cm
- Beam angles: 30°x40°

Application:

- Indoor damp condition wall washer lighting
- High quality cove lighting

Installation accessories:

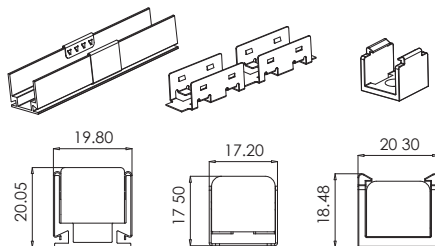

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFWTB 1614	DC24V	12	655	2700K	5mtrs	41.6	48
		12	685	3000K	5mtrs	41.6	48
		12	720	4000K	5mtrs	41.6	48
		12	720	5000K	5mtrs	41.6	48
		12	720	6500K	5mtrs	41.6	48
		12	550	RGB	5mtrs	41.6	48