


Features:

- Top lighting and top bending
- Enhance 3030 LED inside
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP65 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- Min. bending radius 15 cm
- Optional beam angles: 20°/30°/45°/60°/20°x45°

Application:

- Indoor damp condition wall washer lighting

Installation accessories:

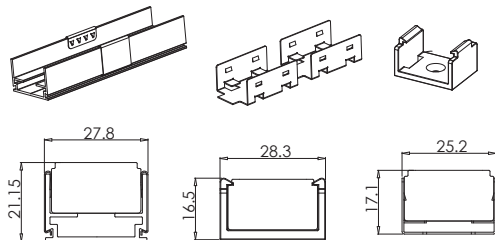

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFWTB 2414	DC24V	20	1700@4000K	White	5mtrs	125	24
		20	560	RGB	5mtrs	250	24
		20	870	RGBW	5mtrs	250	24
		20	560	Pixel RGB	5mtrs	250	24
		20	870	Pixel RGBW	5mtrs	250	24