


Features:


- Top lighting and top bending
- Brand LED optional
- Dual-color silicone extrusion
- Continue linear silicone lens
- UV and yellowish resistant
- IP65 and salt-mist proof
- L70B50 > 50,000hrs
- Min. bending radius 15 cm
- Beam angles: 30°x100°

Application:

- Indoor damp condition wall washer lighting

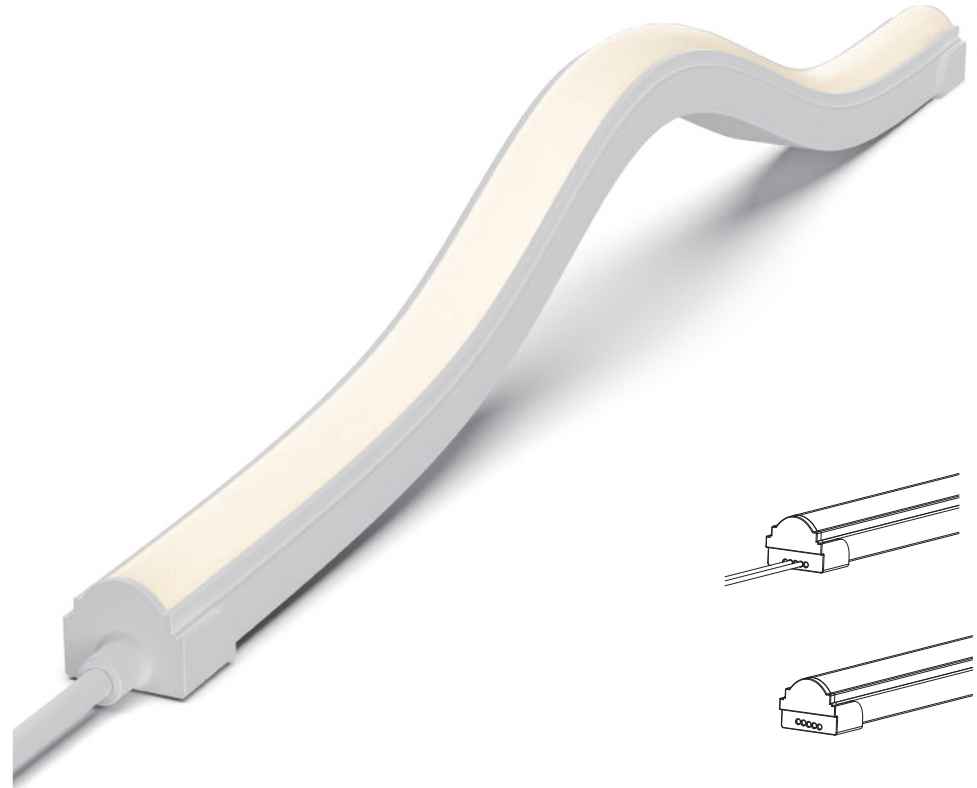

Installation accessories:

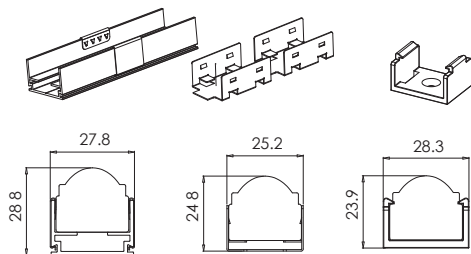

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFWTB 2421	DC24V	20	1700@4000K	White	5mtrs	100	70
		/	/	RGB	/mtrs	/	/
		20	1350@4000K	RGBW	/mtrs	100	70
		13	/	Pixel RGB	/mtrs	100	70
		16.5	/	Pixel RGBW	/mtrs	100	70