


**Features:**


- Top lighting and top bending
- Enhance 3030 LED inside
- Dual-color silicone extrusion
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- Min. bending radius 15 cm

**Application:**

- Outdoor & indoor wall washer lighting

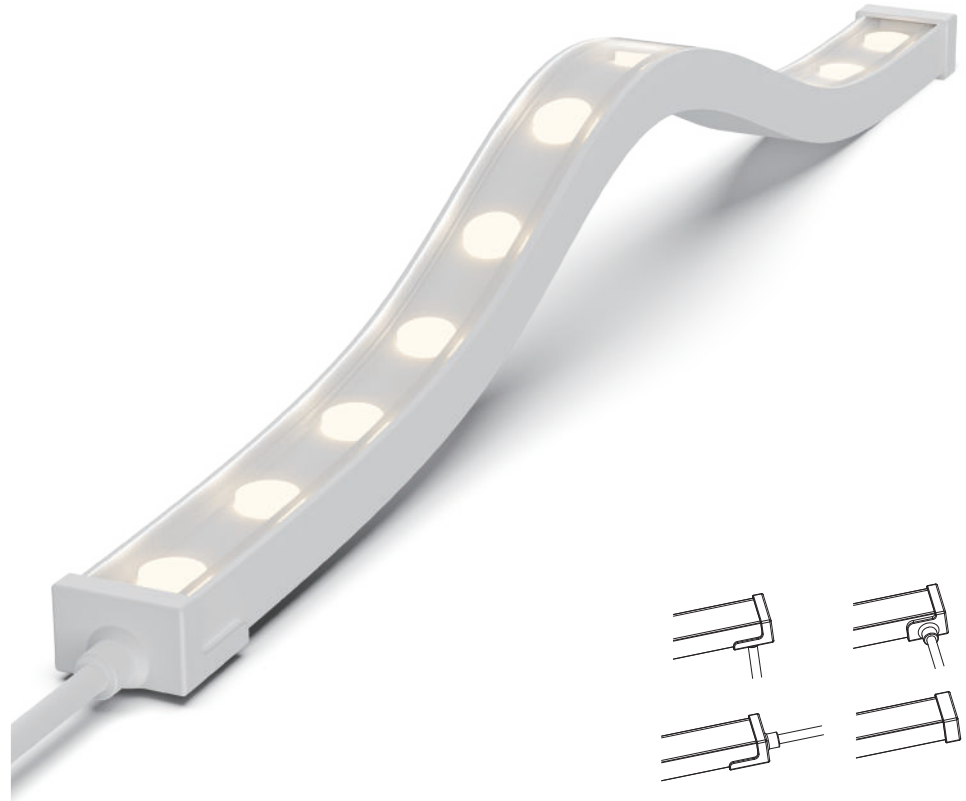

**Installation accessories:**

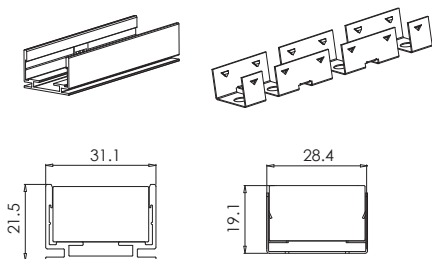

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFWTB 2716	DC24V	24	2250@4000K	White	5mtrs	125	24
		24	750	RGB	5mtrs	250	24
		24	1150	RGBW	5mtrs	250	24
		24	750	Pixel RGB	5mtrs	250	24
		24	1150	Pixel RGBW	5mtrs	250	24