

# Wall Washer

## Optical Lens LED Strip Light



Ambient Working Temperature -20 ~ 40°C(-4 ~ 104°F)



Storage Temperature -20 ~ 60°C(-4 ~ 104°F)



Ambient Installation Temperature 0 ~ 40°C(32 ~ 104°F)

### Product Features


1. Multiple angles are available, different beam angles, for different environments, Optional angle: Single angle 10°/30°/Asymmetric 45° Dual-angle 30°x50°.
2. Can replace the traditional LED Tape Light to achieve the effect of wall-washing, can also be used as a cabinet lamp or household lighting.
3. lens with Silicone encapsulation for durability, reliability, and ease of installation, fast connectors are available.
4. Mounting method: 3M glue tape or mounting clips or match with the aluminum profile.
- 5 years warranty for indoor use and 3 years warranty for outdoor use

# Wall Washer


Part Number: RLLFWTB2835C-42-24(10°)

Flexible LED Wall Washer with Optic Lens


Strip length: **CE:1000CM**

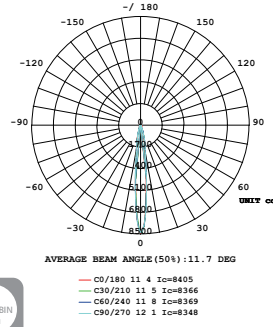


Code	Color temp	LM/0.6M	Power/0.6M	Light efficiency	CRI (Ra)	Package	Minimum section	Beam Angle
RLLFWTB2835W-42-24(10°)	2700K	840LM	<12W	70LM/W	90+	1000CM/Roll	150mm	10°
RLLFWTB2835W-42-24(10°)	3000K	900LM	<12W	75LM/W	90+	1000CM/Roll	150mm	10°
RLLFWTB2835N-42-24(10°)	4000K	960LM	<12W	80LM/W	90+	1000CM/Roll	150mm	10°

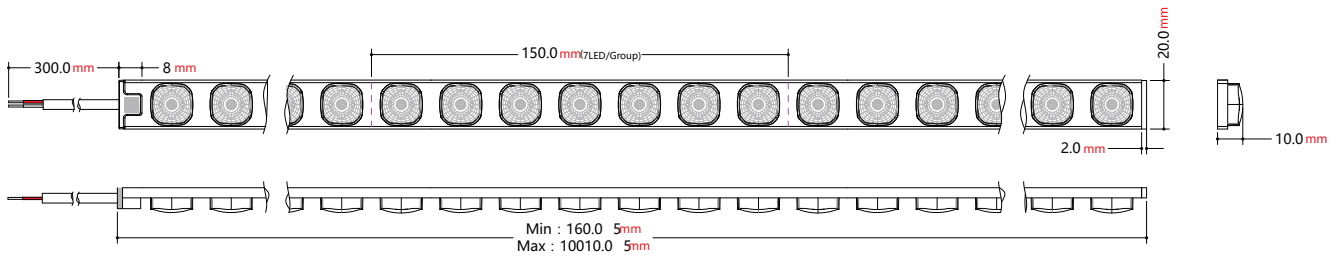


Item	Colortemp	LM/FT	Power/FT	Light efficiency	CRI (Ra)	Package	Minimum section	Beam Angle
RLLFWTB2835W-42-24(10°)	2700K	420LM	6W	70LM/W	90+	33FT/Roll	6inch	10°
RLLFWTB2835W-42-24(10°)	3000K	450LM	6W	75LM/W	90+	33FT/Roll	6inch	10°
RLLFWTB2835N-42-24(10°)	4000K	480LM	6W	80LM/W	90+	33FT/Roll	6inch	10°

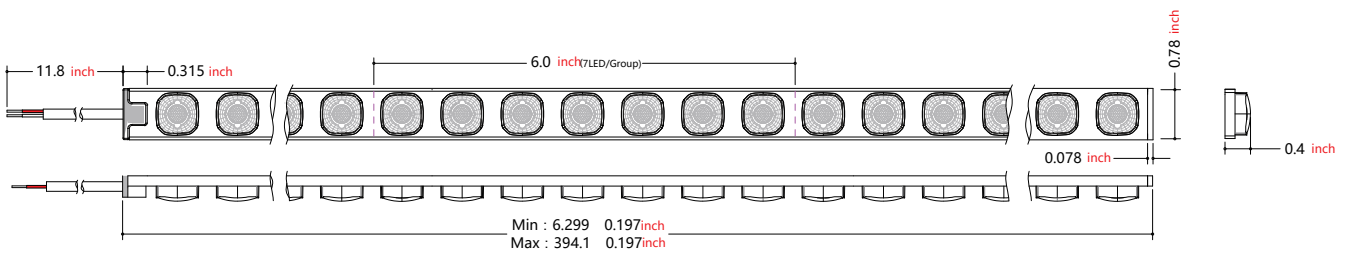


**AL. profiles**




Aluminum Profile  
160103020094-3




PC Cover  
160103010058-1




End Cap without hole  
140308040060-1




End Cap with hole  
140308040059-1



Metal Shrapnel  
(Inner clips)  
140202000041



Adjustable bracket  
(For aluminum profile)  
140202010045+  
140202010044



Aluminum Mounting  
Bracket  
140202010032



Extended connector  
110501010372

**Fast connectors**



Splice connector  
110501010607



End cap with  
powercord  
110501010573



Jumper  
connector  
110501010574



End cap  
110501010606

**Mounting accessories**



Mounting clip  
140202010009

**IP Rating**

IP67 PU +PC Lens  
(silicone encapsulation)

