

Wall Washer

Optical Lens LED Strip Light



Ambient Working Temperature -20 ~ 40°C(-4 ~ 104°F)



Storage Temperature -20 ~ 60°C(-4 ~ 104°F)



Ambient Installation Temperature 0 ~ 40°C(32 ~ 104°F)

Product Features

1. Multiple angles are available, different beam angles, for different environments, Optional angle: Single angle 10°/30°/Asymmetric 45° Dual-angle 30°x50°.
2. Can replace the traditional LED Tape Light to achieve the effect of wall-washing, can also be used as a cabinet lamp or household lighting.
3. lens with Silicone encapsulation for durability, reliability, and ease of installation, fast connectors are available.
4. Mounting method: 3M glue tape or mounting clips or match with the aluminum profile.
- 5 years warranty for indoor use and 3 years warranty for outdoor use

Wall Washer


Part Number: RLLFWTB2835C-42-24(45°) Asymmetric

Flexible LED Wall Washer with Optic Lens


Strip length: **CE:1000CM**




Code	Color temp	LM/0.6M	Power/0.6M	Light efficiency	Energy efficiency Grade	CRI (Ra)	Package	Minimum section	Beam Angle
RLLFWTB2835-42-24(45°)	2700K	1020LM	<12W	85LM/W	G	90+	1000CM/Roll	150mm	45°
RLLFWTB2835-42-24(45°)	3000K	1080LM	<12W	90LM/W	G	90+	1000CM/Roll	150mm	45°
RLLFWTB2835-42-24(45°)	4000K	1140LM	<12W	95LM/W	F	90+	1000CM/Roll	150mm	45°

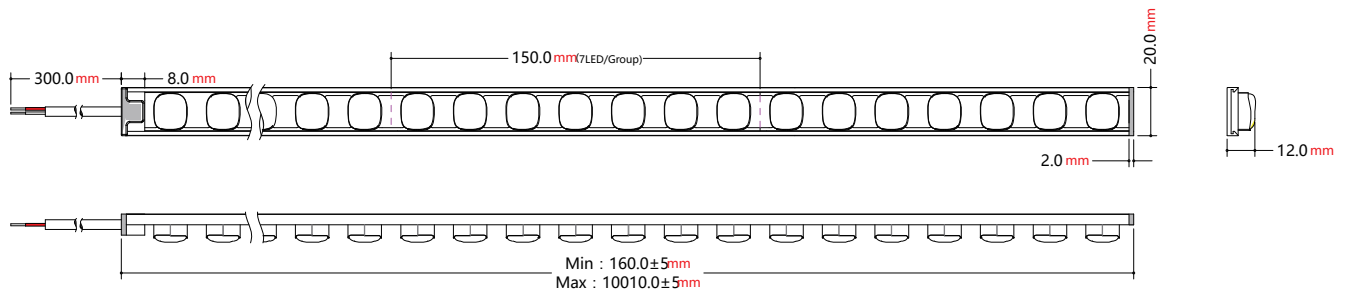


Item	Color temp	LM/FT	Power/FT	Light efficiency	CRI (Ra)	Package	Minimum section	Beam Angle
RLLFWTB2835W-42-24(45°)	2700K	510LM	6W	85LM/W	90+	33FT/Roll	6inch	45°
RLLFWTB2835W-42-24(45°)	3000K	540LM	6W	90LM/W	90+	33FT/Roll	6inch	45°
RLLFWTB2835N-42-24(45°)	4000K	570LM	6W	95LM/W	90+	33FT/Roll	6inch	45°

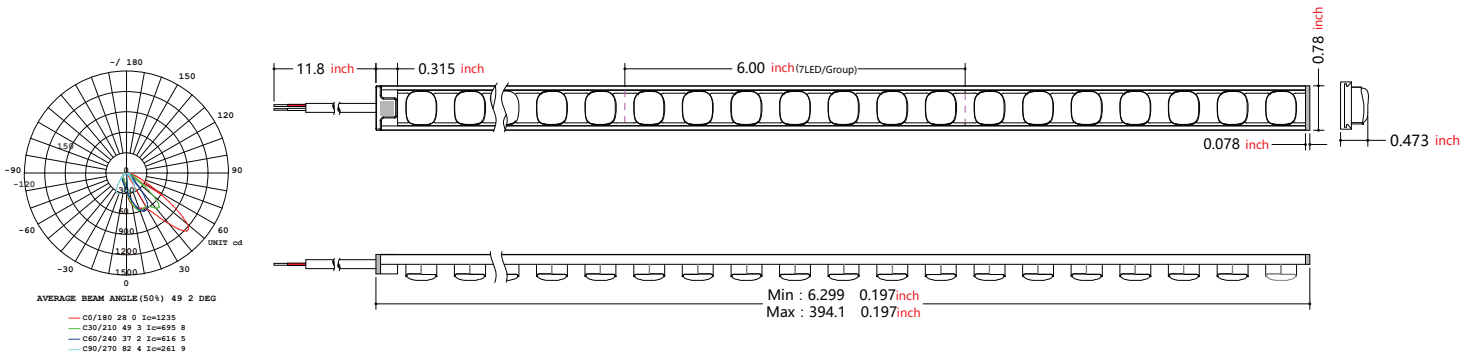


AL. profiles




Aluminum Profile
160103020094-3




PC Cover
160103010058-1




End Cap without hole
140308040060-1




End Cap with hole
140308040059-1



Metal Shrapnel
(Inner clips)
140202000041



Adjustable bracket
(For aluminum profile)
140202010045+
140202010044



Aluminum Mounting
Bracket
140202010032



Extended connector
110501010372

Fast connectors



Splice connector
110501010607



End cap with
powercord
110501010573



Jumper
connector
110501010574



End cap
110501010606

Mounting accessories



Mounting clip
140202010009

IP Rating

IP67 PU +PC Lens
(silicone encapsulation)

