

Wall Washer

Optical Lens LED Strip Light



Ambient Working Temperature -20 ~ 40°C(-4 ~ 104°F)



Storage Temperature -20 ~ 60°C(-4 ~ 104°F)



Ambient Installation Temperature 0 ~ 40°C(32 ~ 104°F)

Product Features


1. Multiple angles are available, different beam angles, for different environments, Optional angle: Single angle 10°/30°/Asymmetric 45° Dual-angle 30°x50°.
2. Can replace the traditional LED Tape Light to achieve the effect of wall-washing, can also be used as a cabinet lamp or household lighting.
3. lens with Silicone encapsulation for durability, reliability, and ease of installation, fast connectors are available.
4. Mounting method: 3M glue tape or mounting clips or match with the aluminum profile.
- 5 years warranty for indoor use and 3 years warranty for outdoor use

Wall Washer

Part Number: RLLFWTB2835WW+W-42-24


Flexible LED Wall Washer with Optic Lens

Strip length: **16FT**

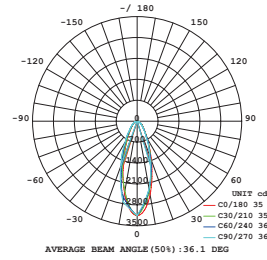


IP Rating
Ip67 PU +PC Lens
(silicone encapsulation)


Code	Tunable CCT	LM/FT	Power/FT	Light efficiency	CRI (Ra)	Beam Angle
RLLFWTB2835WW+W-42-24	2700+6500 K K	585LM	<5.8W	88LM/W	90+	35°

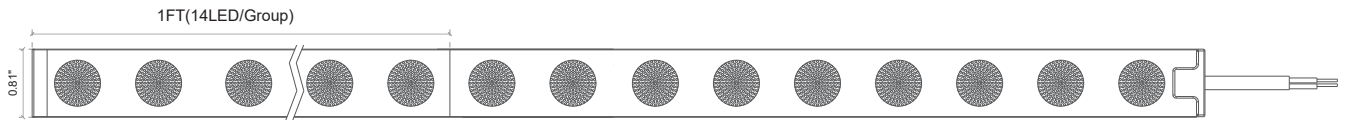


AL. profiles




Aluminum Profile
160103020094-3




PC Cover
160103010058-1




End Cap without hole
140308040060-1




End Cap with hole
140308040059-1



Metal Shrapnel
(Inner clips)
140202000041



Adjustable bracket
(For aluminumprofile)
140202010045+
140202010044



Aluminum Mounting
Bracket
140202010032



Extended connector
110501010372

Fast connectors



Splice connector
110501010607



End cap with
powercord
110501010573



Jumper
connector
110501010574



End cap
110501010606

Mounting accessories



Mounting clip
140202010009

IP Rating
IP67 PU +PC Lens
(silicone encapsulation)

