

RED GREEN BLUE WHITE 4 Color in 1
LED Mixing Linear Wall Washer
4 Colors in one LED Solution



C6FA0620 AL

LED Wave Length

R =620-630 nm
G =520-530 nm
B =460-470 nm
W =6000K

Optics



About lens for suitable for RGBW Module type LED only




Adjustable beam direction


A24



15°

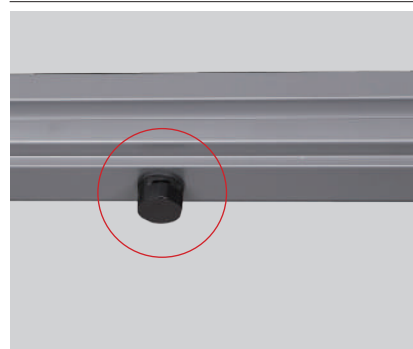


Air Valve

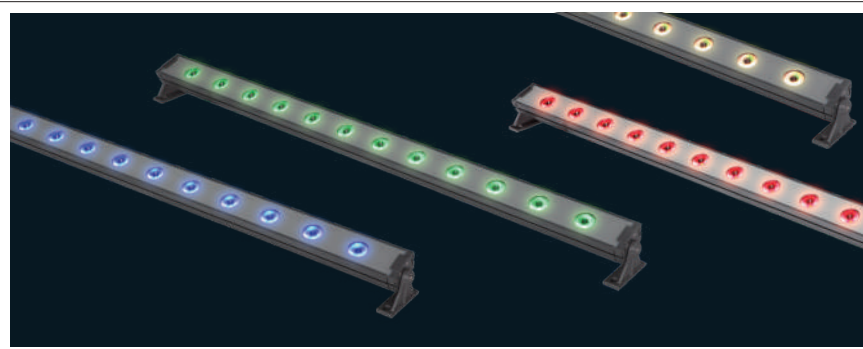

Outer Dimensions

Unit:mm

Low voltage input (24VDC)




C6FA0620 AL


Material Specifications

Housing	Extruded aluminum powder coated
Lens	Optical lens efficiency≥85%
Light Window	Step tempered glass.T=3mm
Cable gland	IP68 PG-13 5 PA66
Gasket	Glass and housing are silicone sealed
LED	Prolight RGBW 4 IN1 LED
Operating temperature	-20°C~40°C
Bracket	12# Die-casting powder coated aluminum
Power Cable	Input : waterproof plug connector Output: waterproof socket connector SJOW 18AWG 2C L=0.25m

Low voltage input (24VDC) power cord model

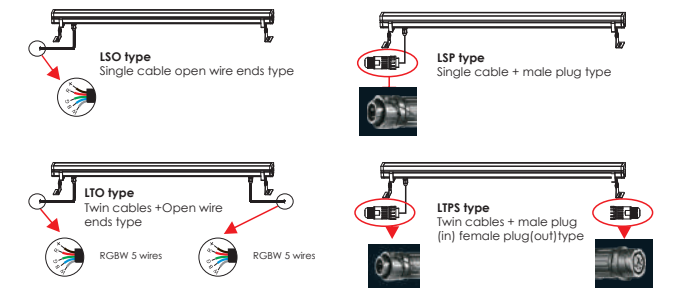

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Length L=(mm)	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
C6FA0620 AL	12×6W RGBW 4in1	A24	15°	1025	24V DC	R= 1000 B=1000 G=1000 W=1000	48	3523	05



A6FA1220 A

