

AQLINE LED RIGID LINEAR

01

IK10, Walkable LED Rigid Linear

02

Working environment $-25^{\circ}\text{C} \sim 65^{\circ}\text{C}$

03

High lighting efficiency: depends on actual output of products' lumen

04

Waterproof: IP68

AQLINE Advantage



IK10
protection

IK10 Protection

Walkable, surface afford step on



UV Protected

No yellowish and No hardening for long time outdoor used



Saltwater Resistant

Especially for yacht and marine lighting



Seamless Connection

Seamless Connection

No darkness, end to end connection



Resistant to Solvents

Especially for swimming pool application



IP68 Waterproof


Perfectly apply to outdoor wet location



AQLINE 19.5*12mm

RLLAQU3

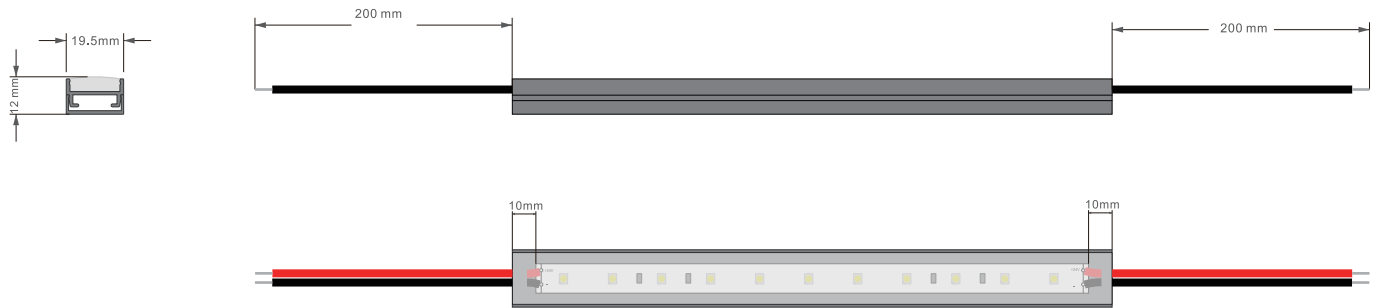

- ▶ Transparent and milky diffuser optional
- ▶ Unique mounting plate design for easy installation
- ▶ Lighting transmission up to 97.7%
- ▶ Waterproof: IP68



Electrical Data

LED Type	LEDs/Mtr	Voltage	Max Current	Electrical Solution	Cut/LEDs
3014	180	DC24V	0.75A/M	CV	33mm/6 LEDs
3014	192	DC24V	0.67A/M	CV	61.87mm/12 LEDs

Spectrum Data

Wattage (W/M)	IC	Lumen (LM/M)	LEDs/Mtr	Efficiency (LM/W)	Color	CRI	PCB width	Electrical Solution	Max Run Length (Single End)
18W	/	1800LM/M	180	100LM/W		80+/90+	15mm	CV	5M
2X8W	/	/	192	/		80+/90+	10mm	CV	5M